

TEST REPORT

(Electronic version)



No:200025418

VERIFICATION WEBSITE: www.gttc.net.cn

VERIFICATION CODE: JMDW-4666-14



ISSUE DATE:2020-03-10

APPLICANT: Shenzhen Miao Miao Supply Chain Technology Co.,Ltd.
ADDRESS: 2F29, No.1026 Huaqiang North Road, Kangle Building, 1026 Huaqiang North Road, Fuqiang Community, Huaqiang North Street, Futian District, Shenzhen

APPLICANT PROVIDED SAMPLE DESCRIPTION:

TWENTY-FIVE (25) PIECES OF LABOR PROTECTION MASK

BRAND: JIANDI

COLOUR: WHITE

MANUFACTURE'S NAME: Dongguan Qinling Clothing Co.,Ltd

DATE RECEIVED/DATE TEST STARTED: 2020-03-04

CONCLUSION:

FILTRATION EFFICIENCY TO NaCl PARTICULATE MATTER	M
INSPIRATORY RESISTANCE	M
EXPIRATORY RESISTANCE	M
FLAMMABILITY	M
HEAD BAND	M

NOTE: "M" -MEET THE STANDARD'S REQUIREMENT "F" -FAIL TO MEET THE STANDARD'S REQUIREMENT
"---" -NO COMMENT

REMARK:

ALL THE TESTED ITEMS ARE TESTED UNDER THE STANDARD CONDITION (EXCEPT FOR INDICATION).

COPIES OF THE REPORT ARE VALID ONLY RE-STAMPED.

THE EXPERIMENT WAS CARRIED OUT AT No.1, ZHUJIANG ROAD, PANYU DISTRICT, GUANGZHOU, GUANGDONG, P. R. CHINA.

APPROVED BY:

Yuan Liu ENGINEER


刘圆

PAGE 1 OF 4

TEST REPORT

(Electronic version)

No:200025418

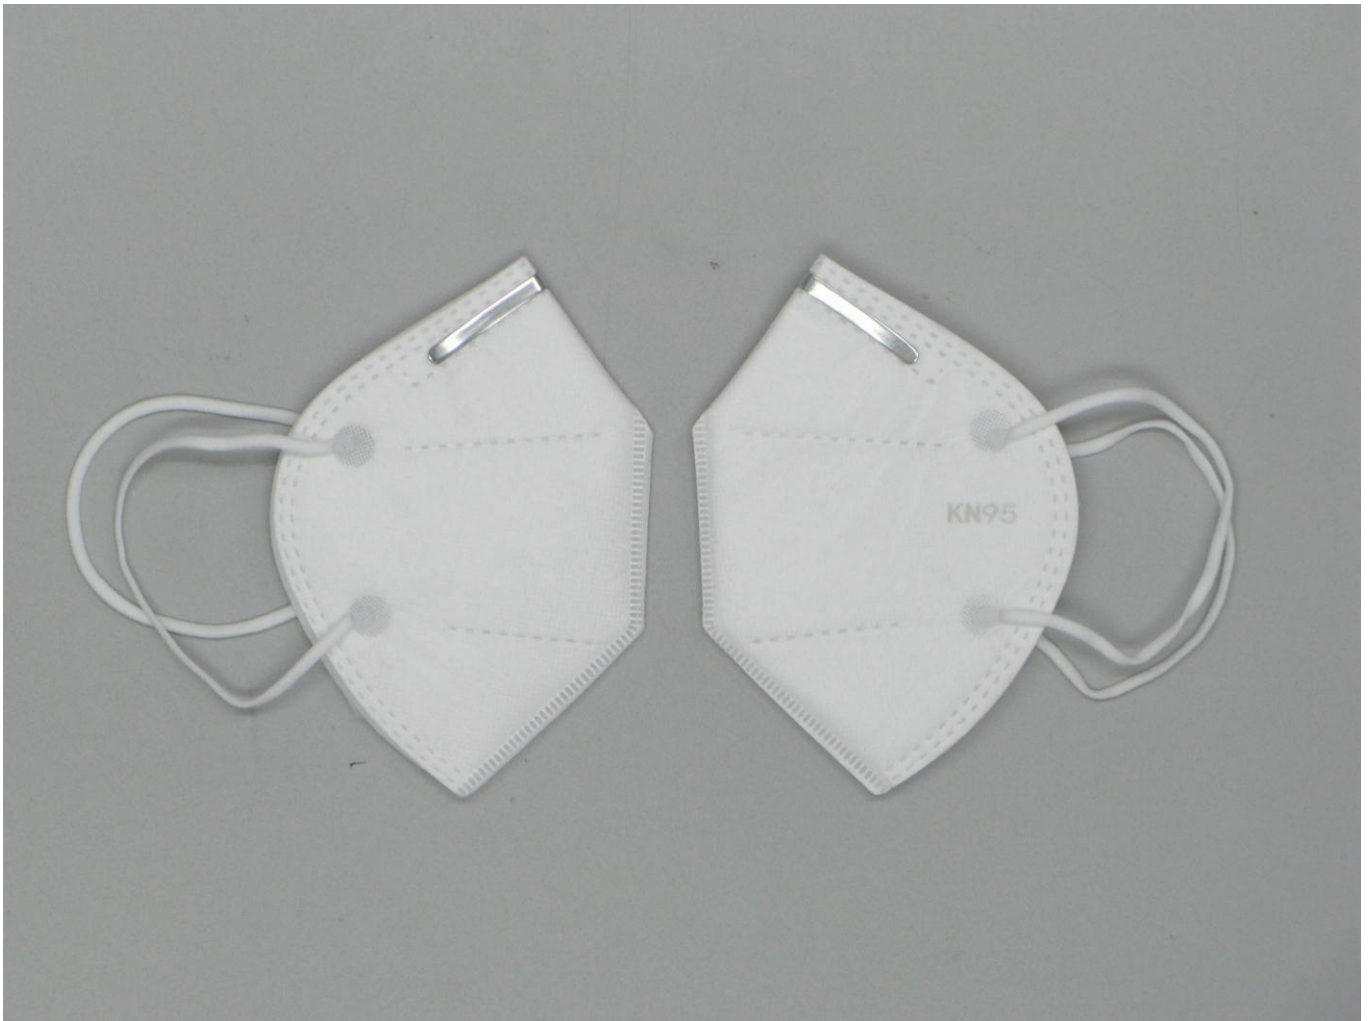

TEST REPORT

(Electronic version)

No:200025418

FILTRATION EFFICIENCY TO NaCl PARTICULATE MATTER

(GB 2626-2006 6.3, AIR FLOW:85L/min, AEROSOL:NaCl, AEROSOL CONCENTRATION:15mg/m³, TEMP:23.1°C, RH:36.0%)

FILTRATION EFFICIENCY(%) :

UNTREATED SAMPLE

1# 97.97
2# 97.96
3# 98.12
4# 98.24
5# 97.86
6# 98.41
7# 98.52
8# 97.88
9# 97.72
10# 98.70

CONDITIONING TREATED

1# 98.00
2# 98.08
3# 97.81
4# 97.46
5# 98.12

REQUIREMENT

FILTRATION EFFICIENCY(%) :

≥95.0
(KN95)
(GB 2626-2006)

INSPIRATORY RESISTANCE (Pa)

(GB 2626-2006 6.5)

UNTREATED SAMPLE

1# 59.7
2# 68.1

CONDITIONING TREATED

1# 66.9
2# 62.1

REQUIREMENT

≤350
(GB 2626-2006)

EXPIRATORY RESISTANCE (Pa)

(GB 2626-2006 6.6)

UNTREATED SAMPLE

1# 60.8
2# 62.1

CONDITIONING TREATED

1# 56.4
2# 58.8

REQUIREMENT

≤250
(GB 2626-2006)

FLAMMABILITY (s)

(GB 2626-2006 6.15)

AFTERFLAME TIME

UNTREATED SAMPLE

1# 0.0
2# 0.0

CONDITIONING TREATED

3# 0.0
4# 0.0

REQUIREMENT

AFTERFLAME TIME

≤5
(GB 2626-2006)

TEST REPORT

(Electronic version)

No:200025418

HEAD BAND

(GB 2626-2006 6.11)

UNTREATED SAMPLE

PASS

CONDITIONING TREATED

PASS

REQUIREMENT

APPLY A FORCE OF 10N ON EACH HEAD BAND,
BUCKLE AND OTHER REGULATING ELEMENTS FOR
10s, SLIPPAGE OR BREAK IS NOT ALLOWED.
(GB 2626-2006)

—————End of Report—————

PAGE 4 OF 4